

TIGER N





	N
	156 78 × 2
	2465 × 1134 × 30mm
	34.0kg
	2.0mm,
	2.0mm,
	IP68
	Class II
	Class C
	TUV 1 × 4.0mm ² 400mm, 200mm

	2525 × 1140 × 1251mm
	36 / , 72 / , 576 /40

	615	620	625	630	635
	47.20	47.37	47.54	47.70	47.86
	13.03	13.09	13.15	13.21	13.27
	56.69	56.82	56.95	57.08	57.21
	13.68	13.74	13.80	13.86	13.92
	22.00	22.18	22.36	22.54	22.72
	0 ~ + 3 %				
	-0.29%/°C				
	-0.25%/°C				
	0.045%/°C				

	463	467	471	475	479
	44.39	44.54	44.69	44.83	44.98
	10.44	10.49	10.54	10.59	10.64
	53.85	53.97	54.10	54.22	54.34
	11.04	11.09	11.14	11.19	11.24

	-40°C ~ +85°C
	1500VDC (IEC)
	30A
	45 ± 2°C
	80 ± 5°C

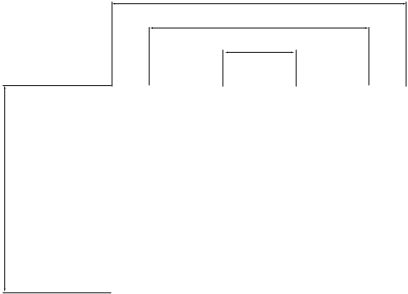

- &56FJ2+@BT 403U'

&U'

&T'

- &56FJ2+@BT 403U'

&P'

&T'